

PUPITRE MICROFÓNICO DE ZONAS

MD-30R12

Pupitre microfónico de sobremesa con 12 teclas de selección zona. Permite generar avisos en directo con prioridad, según el sistema de megafonía. Con función de REPEAT para repetir del último aviso. El equipo se compone de dos piezas, el pupitre microfónico y la caja de conexiones CZ-30.



- Teclas de aviso con gong, aviso sin gong y de repetición del último aviso.
- Teclas de selección (12) + *all call*.
- LEDs de zonas seleccionadas, alimentación, sistema ocupado, gong en curso y hablar / reproducir.
- Supervisión: cápsula y estado interno.
- Compresor interno.
- Grabación automática del último aviso, hasta 16 s.
- Nivel de salida de señal de audio configurable (-60dB / 0dB).
- Gong configurable de 3 o 4 tonos.
- Gong al finalizar el aviso (configurable).
- Coste de instalación reducido: distancia entre caja de conexión (CZ-30) y pupitre de hasta 100 metros con cable FTP cat 5.

Especificaciones técnicas



Salida	RJ45 -60 dB / 0 dB (simétrica mediante transformador 600 Ω)
Respuesta frecuencial	300 Hz ~ 14 KHz
Alimentación	24 VCC
Consumo	250 mA
Peso	1,6 Kg (pupitre)
Acabados	Plástico Bayblend RAL
MICRÓFONO	
Cápsula	Dinámica
Diagrama polar	Unidireccional
Material	Aluminio

Conexión

La distancia entre el pupitre y la caja de conexión se puede aumentar hasta un máximo de 100 metros, utilizando un cable FTP categoría 5 y conectores RJ45.

De esta manera se facilita la instalación de la caja CZ-30 en el rack de megafonía y el pupitre a la distancia necesaria.

Al igual que en el cable original de cinco metros, para reforzar la conexión es recomendable utilizar los conectores ETHERCON modelo NE8MC.

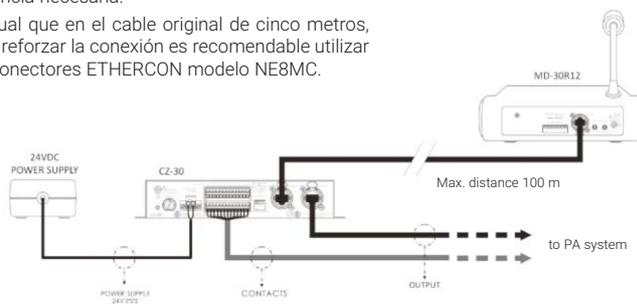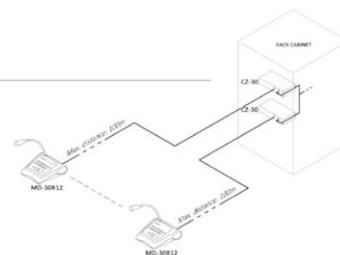

ZONE SELECTION MICROPHONE DESK

MD-30R12

Desktop microphone console with 12 keys for zone selection. It allows sending live messages with priority, according to the PA system. With REPEAT function to repeat the last message. The equipment consists of two parts, the microphone desk and the connections box CZ-30.



- Keys for message with gong, message without gong and last message repetition.
- Selection keys (12) + *all call*.
- LEDs for selected zones, power, busy system, gong in progress and talk / play.
- Supervision: capsule and internal status.
- Internal compressor.
- Automatic recording of last call, up to 16 seconds.
- Output level of audio signal selectable (-60dB / 0dB).
- Configurable Gong of 3 or 4 tones.
- Gong at the end of the message (configurable).
- Reduced installation cost: distance between junction box (CZ-30) and console up to 100 meters with cable FTP cat 5.

Technical specifications

Output	RJ45, -60 dB / 0 dB (balanced by 600 Ω transformer)
Frequency Range	300 Hz ~ 14 KHz
Power supply	24 V DC
Consumption	250 mA
Weight	1,6 Kg (desktop microphone)
Finish	Bayblend
MICROPHONE	
Capsule	Dynamic
Polar diagram	Unidirectional
Material	Aluminium

Connection

The distance between the desk and the junction box can be increased up to 100 meters, using an FTP category 5 cable and RJ45 connectors.

This way you can install the CZ-30 box in the PA rack and the microphone desk at the required distance.

To reinforce the connection is recommended to use ETHERCON connectors NE8MC model, as in the original five-meter cable.

